



## Architrave Wedge

**Glass reinforced Nylon Housing. IP55 Rated or greater. Washable.  
Tough acrylic or 304 grade Engraved Brushed Stainless Steel signage  
Visually and functionally improved when positioned at 800 - 900 FFL  
Attach to Architraves, Posts or Barriers**

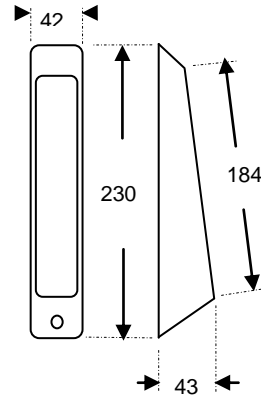

Simple installation  
2 x No 8 screws  
(1 concealed)

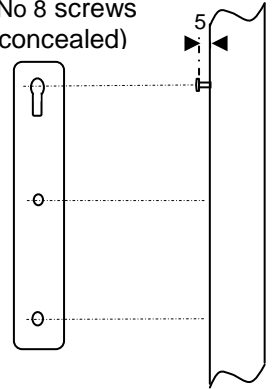

### Hard-wired specification:

12 – 28v DC.

Sensitivity adjustment. (Touch to Hands Free. App 50mm)

Timed Clean Relay outputs.

Selectable Red Green & Blue LED's.

Sounder on activation.

Entire Label is sensitive.

Bespoke Label Option.

### Radio specification:

868.35 MHz Rolling code.

4 x AA Alkaline Batteries.

App 100000 + operations.

(dependant on environment)

Green LED on activation (Acrylic only)

Sounder on activation.

Battery saving design, unit will only transmit once if hand is left on.

Entire Label is sensitive.

Bespoke Label option.

### Receiver:

12 - 24v

868Mhz Rolling Code.

2 Channel. Momentary or Bi Stable.

200 Memory.

Fobs also available.



Stainless

Acrylic

Stainless Post