

## Round Wedge


Glass reinforced Nylon Housing. IP55 Rated.

Tough acrylic or 304 grade Brushed Stainless Steel signage.

The design of this unit enables directional installation.

ie: The unit is supplied with the Label unattached, if required the unit may be installed to give visual bias in either direction.

Ideal for corridor situations.

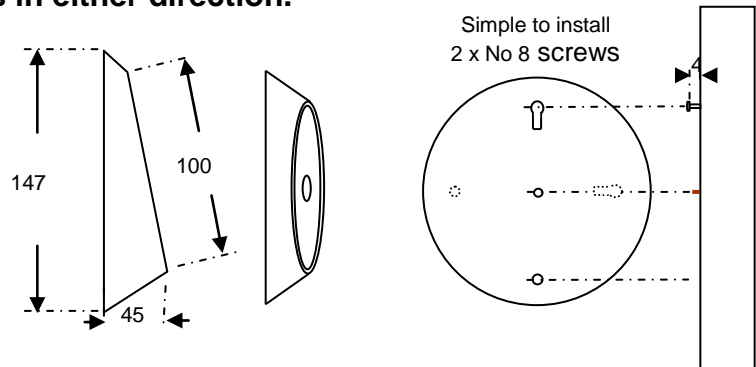

### Hard-wired specification:

12 – 28v DC.

4 position sensitivity adjustment. (Touch to Hands Free 100mm)

Timed Clean Relay outputs.

Red. Green & Blue LED's.

Entire Label is sensitive.

Bespoke Label Option.

### Radio specification:

868mhz Rolling code.

Sounder & LED on activation.

4 x AA Alkaline Batteries.

App 100000 operations.

(dependant on environment)

Battery saving design, unit will only transmit once if hand left on.

Entire Label is sensitive.

Bespoke Label



### Receiver:

12 - 24v

868Mhz Rolling Code.

2 Channel. Momentary or Bi Stable.

200 Memory. Fobs also available.

